




EPS BOX PRO

THREE-PHASE

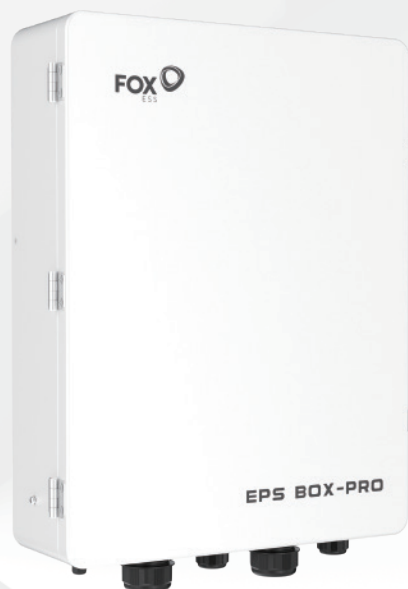

- PC, Robust metal enclosure IP65
- Applied to residential, commercial solar installations
- Compatible with H3/AIO H3/H3 Smart inverter
- Automatically switch to On-Grid/Off-Grid state



Max. input current
(per phase) 63A



Safety



IP65
Rated



Easy
Installation



For more information about the Fox ESS range, visit:
www.fox-ess.com



TECHNICAL SPECIFICATIONS

MODEL	EPS BOX PRO
UTILITY SUPPLY	
Rated Voltage [VAC]	220 / 380, 230 / 400, 3L / N / PE
Rated Frequency [Hz]	50 / 60
Max. Input Current (Per Phase) [A]	63
INVERTER GRID	
Rated Voltage [VAC]	220 / 380, 230 / 400, 3L / N / PE
Rated Frequency [Hz]	50 / 60
Max. Input Current (Per Phase) [A]	25
INVERTER EPS	
Rated Voltage [VAC]	220 / 380, 230 / 400, 3L / N / PE
Rated Frequency [Hz]	50 / 60
Max. Input Current (Per Phase) [A]	25
LOAD	
Rated Voltage [VAC]	220 / 380, 230 / 400, 3L / N / PE
Rated Frequency [Hz]	50 / 60
Max. Output Current (Per Phase) [A]	63
COMMUNICATION INTERFACE	
RS-485	Meter
GENERAL DATA	
Cooling Concept	Natural
Installation	Wall-mounted
Operating Temperature Range [°C]	-25 ~ +60 (Derating at 45)
Dimensions (W*H*D) [mm]	420 * 550 * 139
Dimensions of packing (W*H*D) [mm]	515 * 660 * 235
Net Weight [kg]	16
Gross Weight [kg]	19.3
Ingress Protection	IP65